


P10 - automatic SMT dispensing and pick & place machine with optical alignment system

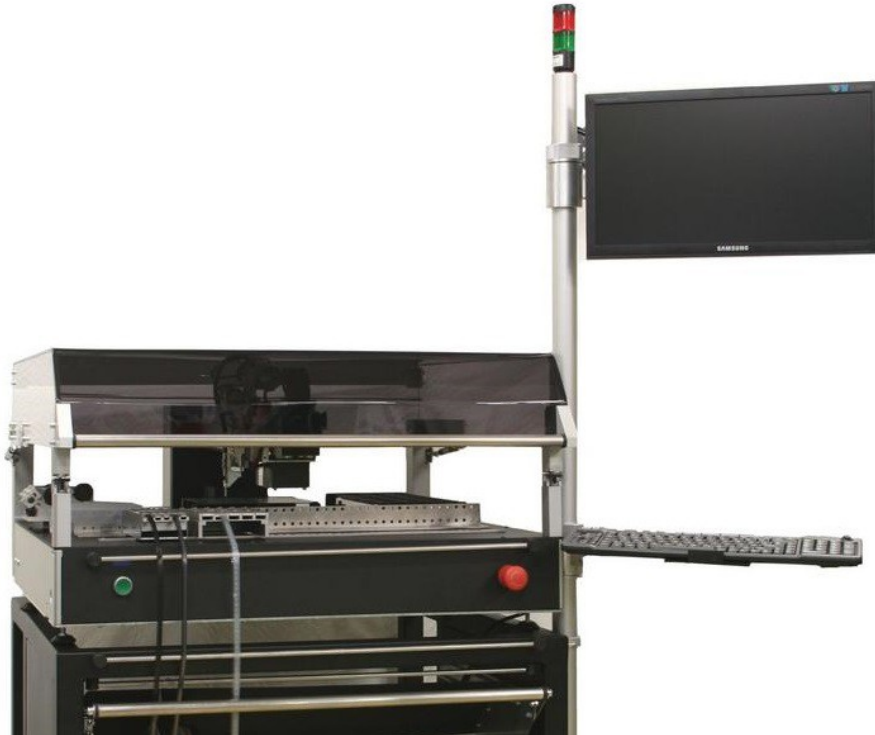

• **TECHNICAL DATA**

- **PCB**
 - max. placement area 500 x 480mm
- **Components range**
 - from 0201 up to 40x80mm
 - min. pitch 0,4mm
- **Components packing**
 - tapes / sticks / trays / bulk
- **Components centering**
 - optical alignment
- **Placement rate**
 - up to 1200 cph
- **dispensing rate**
 - up to 7500 cph
- **Feeder capacity**
 - up to 80 x 8mm – strips feeder and
 - 2 x (300 x 200mm) - IC-tray with 200 x 300mm PCB size
- **Resolution**
 - X / Y axis – 0,008mm - linear encoders
 - Z axis – 0,020mm - linear encoder
 - Theta – 0,01° - rotation encoder
- **Placement accuracy**
 - +/- 0,03 mm
- **Dimensions and weight**
 - 840 x 630 x 430 mm / ca. 92 kg
- **Supply**
 - 110-230V /50-60Hz/1150W /0,6 Mpa /25 l/min

• **KEY FEATURES**

- automatic vision SMT pick and place machine with dispensing head
- 1 x automatic pick & place head
- 1 x automatic dispensing head
- automatic nozzle changer - 6 tools
- top camera - system for automatic fiducial
- bottom camera - optical alignment for SMD components
- CAD – editor for pick & place files
- Gerber – editor for dispensing files
- teach-in mode
- image processing system
- operating system: Windows 7/8
- control panel: PC keyboard / mouse
- graphical user interface
- application range
 - prototypes and low volume production
 - pick & place of all types of SMD components