


Liquid dispensing system D30-H

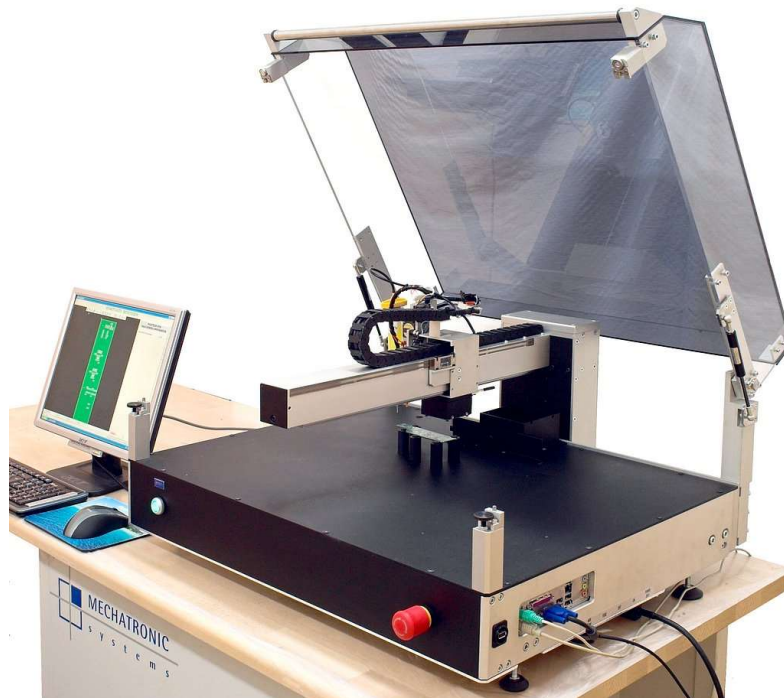

• TECHNICAL DATA

- **PCB**
- max. dispensing area 400 x 500mm
- **dispensing rate**
- over 20 000 dots/h
- **dispense valve**
- Jet dispensing valve– for high viscosity media
- **Heights measurement**
- contactless
- **Resolution**
- X / Y Axis - 0,003mm
- **Positioning accuracy**
- +/- 0,03 mm
- **Dimensions and weight**
- 840 x 630 x 430 mm / ca. 95 kg
- **Supply**
- 230 V - 50 Hz - 350 W / 0,6 Mpa -15 l/min

• KEY FEATURES

- **contactless automatic dispensing machine**
- **automatic dispensing head**
- **camerasystem for automatic fiducial**
- **CAD –Gerber editor**
- **optical calibration of dispensing needle**
- **image processing system**
- **operating system: Windows**
- **control panel: PC keyboard / Mouse**
- **option- second dispensing valve**
- **Application range**
 - high- to medium volume production
 - dispensing of SMT glu, oil or solder paste
 - microdispensing